

Characteristics:

- Galvanised steel pipes
- Brass fittings
- Aluminium base and pedal
- Fully coated in anti-corrosion epoxy paint
- Manual control
- Floor-mounted
- Green ABS basin
- Eyewash spray heads equipped with rubber sleeves and dust covers
- Aerated, regulated water stream

- G1" water supply
- G1" drain
- Shower flow rate: 30 l/min
- Eyewash flow rate: 12 l/min
- Min. pressure 2 bar


For the safety of personnel, showers and eyewash stations are essential on sites where there is any risk of splashing of hazardous products. These units are therefore recommended for laboratories, workshops, hospitals, universities, schools, etc.

Showers and eyewash stations are first-aid equipment, which must be installed near the source of the hazard and, if possible, near a standard water supply. They must be easily accessible and clearly signposted.



Combination Shower & Eyewash Station

Model 1100-380G

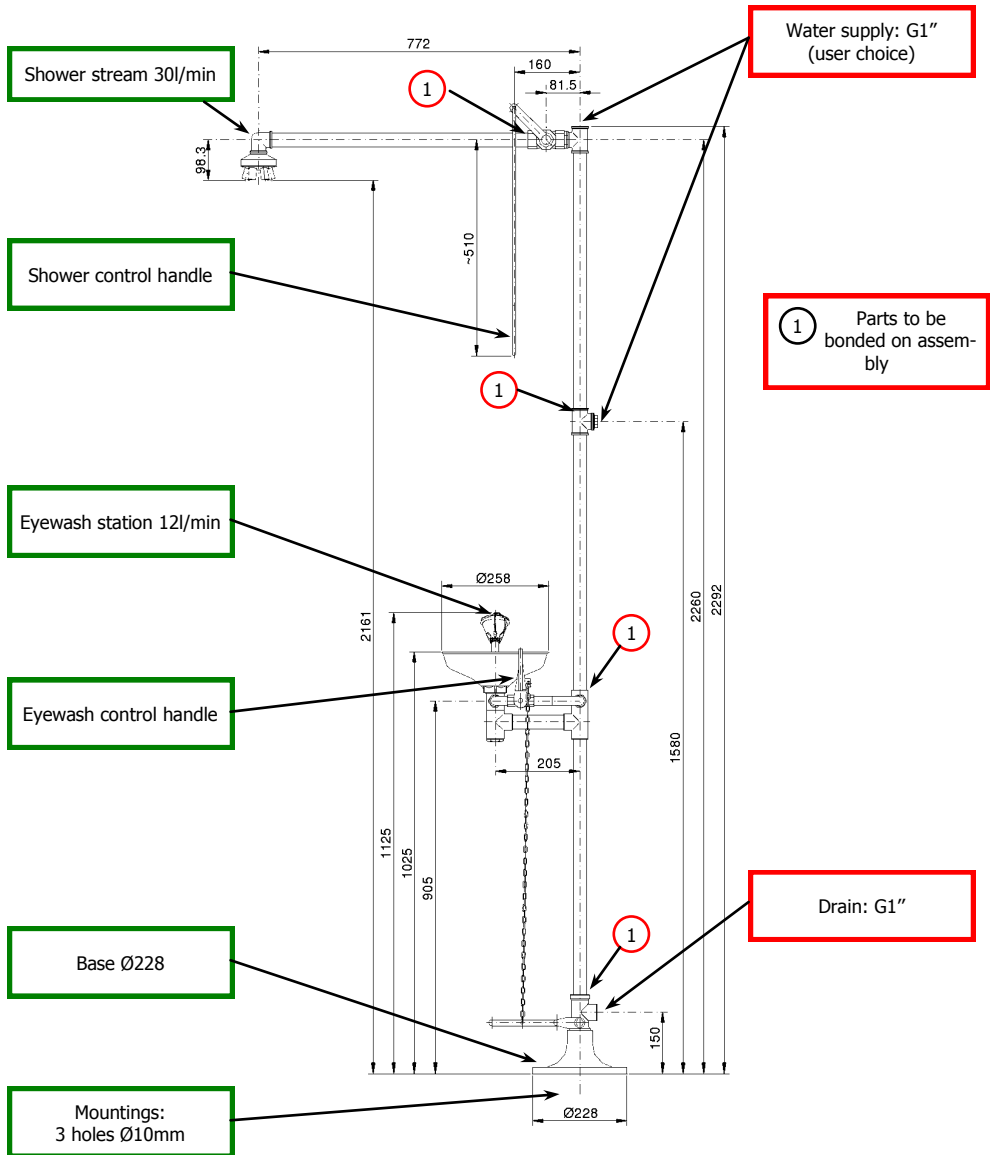

Combination Shower & Eyewash Station

Model 1100-380G

SHOWER

- 1100/94 Lever
- 1100/136 Shower head
- 1100/107/1 Valve
- 1100/150/3 Operating handle

EYEWASH STATION

- 1100/103 Eyewash spray head
- ST-145 Sleeve
- 1100/301 Basin
- 1100/138 Valve
- 1100/330/1 Operating pedal (optional)

GENERAL

- 1100/302 Thread sealant
- 1100/210 Safety sign

