

Freeze-proof Eyewash

Model 2220 FP

Norms :

CE EN 15154-1 and CE EN 15154-2
AFNOR NF X08.003.

Outdoor use.

Characteristics :

Pipes in hot galvanized steel, coated with 300/400 micron Rilsan
Color Yellow

Floor installation (in the ground)

Automatic drain

Manual command by platform

Eyewash eyes with 2 spray heads + stainless steel filter

Water supply : G1/2' in the ground (1000mm)

Water flow : 12 l/mn

Min. Pressure : 2 bars

Principle of functioning :

Freeze-proof valve is self draining and operates on the principle of "dry pipe system". After use, the remaining water flow underground through automatic drain on feeding valve.


For the safety of personnel, showers and eyewash stations are essential on sites where there is any risk of splashing of hazardous products. These units are therefore recommended for laboratories, workshops, hospitals, universities, schools, etc.

Showers and eyewash stations are first-aid equipment, which must be installed near the source of the hazard and, if possible, near a standard water supply. They must be easily accessible and clearly signposted.



Freeze-proof Eyewash

Model 2220 FP

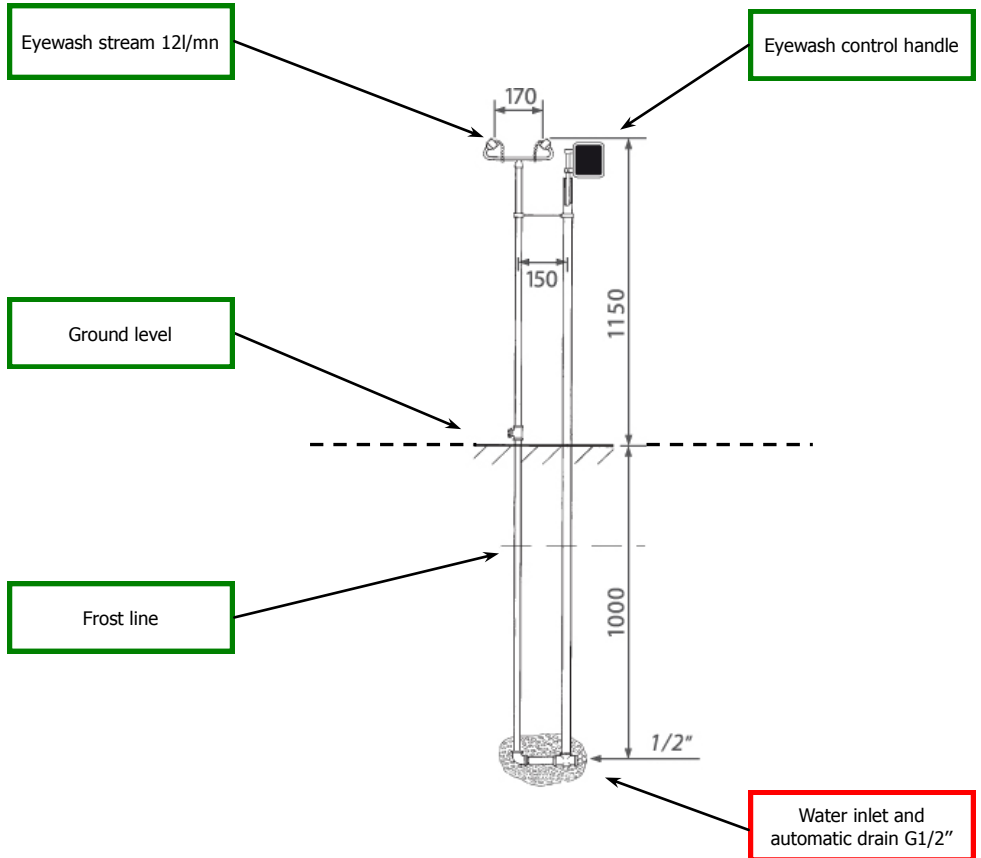

Freeze-proof Eyewash

Model 2220 FP

SHOWER

100SS	Shower head
400	Valve
346	Operating handle

EYEWASH

123 to 136	Eyewash spray head
150S	Basin



GENERAL

316	Kit valve
131 to 134	Operating pedal
128	Base
5006	Safety signs

123 to 136



346

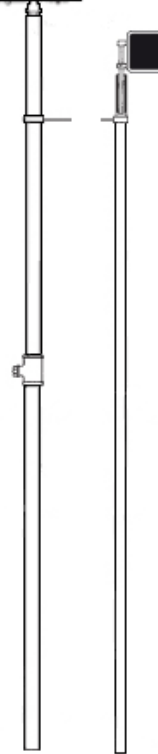

316

